


Maximum plane & cone plots of canela



Caprilla 400W MH

## caprilla

### APPLICATION


Entrances, walkways, loading docks, tunnels, under-passes and many other wall mounted area lighting applications.

### FEATURES

- Suitable for wet locations.
- Two-piece die-cast aluminium housing (front and back pieces), with polyester powder paint finish. Colour: Black.
- EPDM gasketed luminaire.
- Standard E40 or E27 base socket (depending on lamp). Mogul available on request.
- Moulded Borosilicate prismatic glass lens.

### CHARACTERISTICS

- Optical assembly : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : 250W~400W
- Lamp type : HPS, M/H
- Dimensions (mm) : 419(L) x 178(W) x 441(H)
- Approx. Net weight : 9 kg

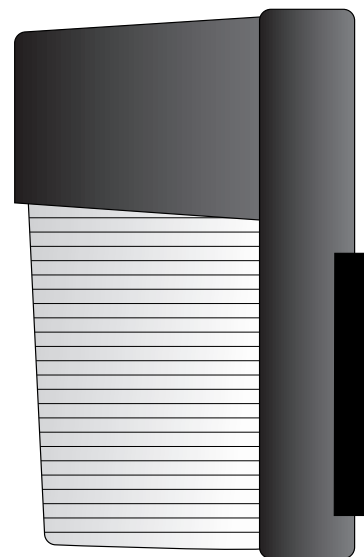

Model No.	Description	Voltage	Frequency	Lamp
GPL00277	GRUPPE CAPRILLA (Empty)	220-240V	50-60Hz	E40
GPCP0645	CAPRILLA 250W M/H C/W Gear & Lamp	220-240V	50-60Hz	E40
GPCP0646	CAPRILLA 400W M/H C/W Gear & Lamp	220-240V	50-60Hz	E40
GPCP0647	CAPRILLA 250W HPS C/W Gear & Lamp	220-240V	50-60Hz	E40
GPCP0648	CAPRILLA 400W HPS C/W Gear & Lamp	220-240V	50-60Hz	E40

ordering information