



airy evolution 300

ADVANTAGES

- Architectural stylish appearance

APPLICATION




- Walkway, corridor, alley
- Car park, staircase, building

FEATURES


- Enclosed luminaire for wall/ceiling.
- Die cast aluminium housing. Stainless steel screw.
- Finished with epoxy polyester paint – White or Black.
- High impact resistant polycarbonate glass diffuser.
- Weatherproof and durable silicon sealed rubber gasket.

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 66
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 13W~26W
- Lamp Type : PLC/GLS
- Dimensions (mm) : 300(L) x 168(W) x 134(H)
- Lamp Holder : G24d-1 x 2PIN
G24d-3 x 2PIN

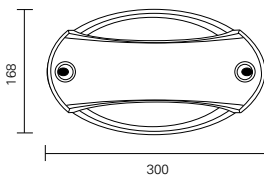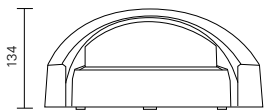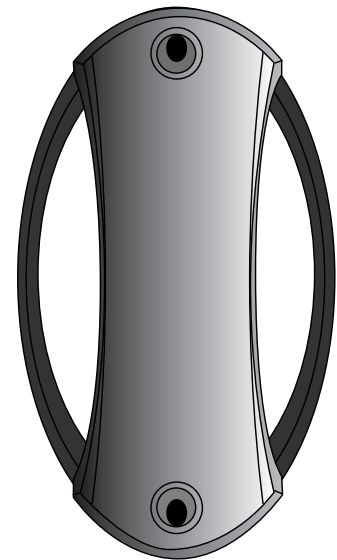

dimension (mm)

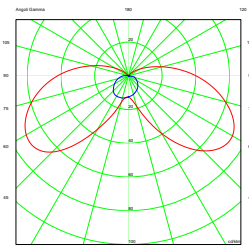

airy evolution 1x26W

Model No.	Description	Voltage	Frequency
LMBC0008	AIRY EVOLUTION 300 1x13W PLC C/W Gear & Lamp	220-240V	50-60Hz
LMBC0009	AIRY EVOLUTION 300 1x18W PLC C/W Gear & Lamp	220-240V	50-60Hz
LMBC0010	AIRY EVOLUTION 300 1x26W PLC C/W Gear & Lamp	220-240V	50-60Hz

NOTE: Please specify colour and type of lamp when ordering

ordering information