



oris





oris 1

oris 2

oris 3

oris 4

oris



dimension (mm)

ADVANTAGES

- Architectural stylish appearance

APPLICATION


- Walkway, corridor, alley
- Car park, staircase, building

FEATURES

- Enclosed luminaire for wall/ceiling.
- Die cast aluminium housing.
- Finished with epoxy polyester paint – White or Black.
- High impact resistant opal polycarbonate diffuser.
- Stainless steel locking devices.
- Weatherproof and durable silicon sealed rubber gasket.

CHARACTERISTICS

- Optical assembly : IP 54
- Ballast Compartment : IP 54
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 13W~18W
- Lamp Type : 1 x PLC / 2 x PLC
- Dimensions (mm) : 349(L) x 125(H)
- Lamp Holder : G24d1 (VDE)
G24d2 (VDE)

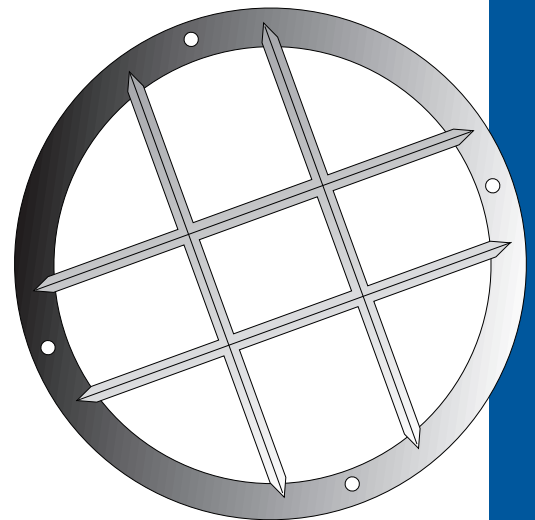

Model No.	Description	Voltage	Frequency
GPCP0527	ORIS/O 2x13W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0522	ORIS/O 2x18W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0523	ORIS/1 2x13W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0412	ORIS/1 2x18W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0524	ORIS/2 2x13W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0413	ORIS/2 2x18W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0525	ORIS/3 2x13W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0414	ORIS/3 2x18W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0526	ORIS/4 2x13W C/W Gear & Lamp	220-240V	50-60Hz
GPCP0415	ORIS/4 2x18W C/W Gear & Lamp	220-240V	50-60Hz

NOTE: 2x26W lamps available upon request

ordering information

NOTE: Please specify colour and type of lamp when ordering