






zen 0



zen 1



zen 2





zen 3



zen 4

zen



dimension (mm)

ADVANTAGES

- Architectural stylish appearance

APPLICATION


- Walkway, corridor, alley
- Car park, staircase, building

FEATURES

- Enclosed luminaire for wall/ceiling.
- Die cast aluminium housing.
- Finished with epoxy polyester paint – White or Black.
- High impact resistant opal polycarbonate diffuser.
- Stainless steel locking devices.
- Weatherproof and durable silicon sealed rubber gasket.

CHARACTERISTICS

- Optical assembly : IP 54
- Ballast Compartment : IP 54
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 13W~18W
- Lamp Type : 1 x PLC / 2 x PLC
- Dimensions (mm) : 340(L) x 340(W) x 100(H)
- Lamp Holder : G24d1 (VDE)
G24d2 (VDE)

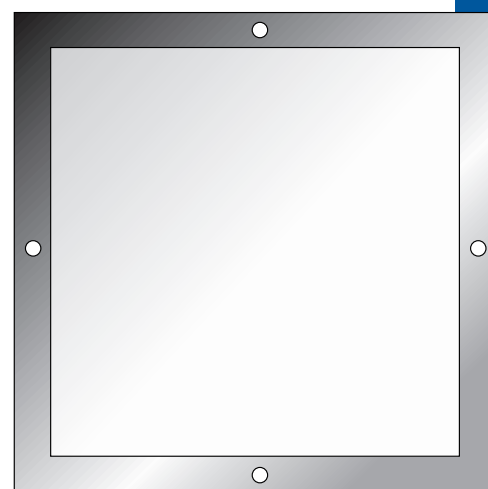

Model No.	Description	Voltage	Frequency
GPCP0552	ZEN/1 2x18W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0553	ZEN/2 2x18W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0554	ZEN/3 2x18W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0555	ZEN/4 2x18W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0556	ZEN/5 2x18W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0601	ZEN/1 1x26W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0602	ZEN/2 1x26W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0603	ZEN/3 1x26W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0604	ZEN/4 1x26W C/W Control Gear & Lamp	220-240V	50-60Hz
GPCP0605	ZEN/5 1x26W C/W Control Gear & Lamp	220-240V	50-60Hz

NOTE: 2x26W lamps available upon request

ordering information

NOTE: Please specify colour and type of lamp when ordering