






ecolan



dimension (mm)




Outdoor luminaire for semi-recessed or surface mounting with upward and downward light distribution (1/3 and 2/3) with prismatic control. By turning the position of the luminaire it is possible to obtain predominantly indirect or direct illumination. Suitable for low mounting heights also.

APPLICATION

- Suitable for external perimeter lighting.

FEATURES

- High impact resistant injection molded composite technopolymer body.
- Self-extinguishing V0-UL94.
- UV stabilized polycarbonate prismatic diffuser.
- Glow-wire test, IEC695-2-1, 850°C.
- Silicone rubber gaskets.
- Super pure aluminium reflector.
- Internal cable looping facility.
- Suitable for heavy-duty service (EN 60598-1) mechanical shock resistant up to 6,5Nm.
- Mounting on normally inflammable surfaces allowed.

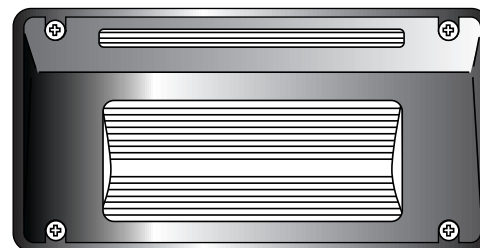

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : PLC 18~26W
- Lamp Type : G24d2
- Dimensions (mm) : 265(L) x 140(W) x 135(H)

Model No.	Description	Voltage	Frequency	Lamp
CTCP0007	ECOLAN 1x18W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24d2
CTCP0008	ECOLAN 1x28W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24d2

ordering information