



step light 6




step light 1

step light 2

step light 3

step light 4

step light 5



dimension (mm)

### step light

#### ADVANTAGES

- Architectural stylish appearance
- Fully aluminium (GPL6005 - stainless front panel)
- Easy maintenance

#### APPLICATION


- Walkway, stairs, garden
- Public area building

#### FEATURES

- Die cast aluminium housing and frame.
- Finish with epoxy polyester powder paint.
- Weatherproof and durable silicon sealed rubber gasket.
- Polycarbonate diffuser cover and mounting box.

#### CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : 9W~40W
- Dimensions (mm) : 248(L) x 82(W) x 116(H)
- Approx. Net weight : 0.5 kg

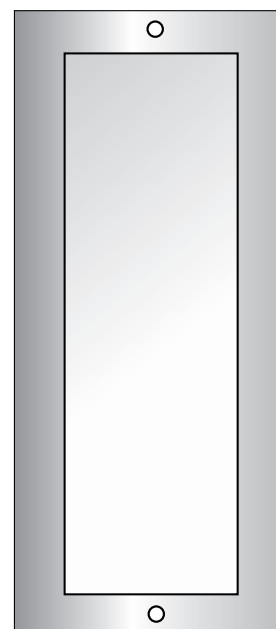

Model No.	Description	Voltage	Frequency	Lamp
GPL6000	STEP 40W MAX INCANDESCENT	220-240V	50-60Hz	E27
GPCP0651	STEP 1x9W PLS C/W Gear & Lamp	220-240V	50-60Hz	G23
GPCP0652	STEP 1x13W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24q-1
GPCP0653	STEP 1x18W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24q-2

NOTE: Please specify colour and type of lamp when ordering

# ordering information