



como

ADVANTAGES

- Architectural stylish appearance

APPLICATION



- Walkway, corridor, alley
- Car park, staircase, building

FEATURES


- Enclosed luminaire for wall/ceiling.
- Die cast aluminium housing.
- Finished with epoxy polyester paint – White or Black.
- High impact resistant prismatic diffuser (PC).
- Stainless steel locking devices.
- Weatherproof and durable silicon sealed rubber gasket.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 11W~38W
- Lamp Type : PLC & 2D
- Dimensions (mm) : 315(L) x 315(W) x 95(H)
- Lamp Holder : 2G11 x 4PIN
: GR10q x 4PIN
: 2G10 x 4PIN

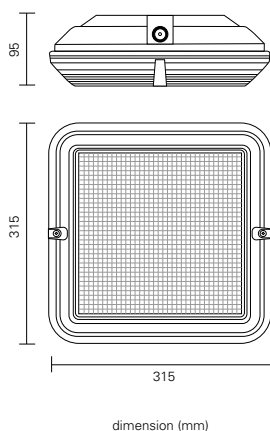

omnia 2x11W

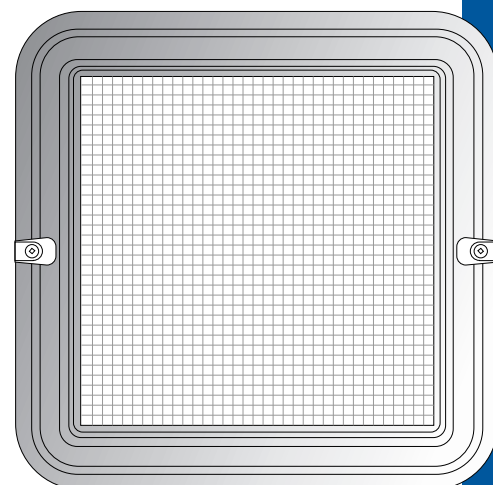

Model No.	Description	Voltage	Frequency
GPCP0823	COMO 2x11W PL-S C/W Gear & Lamp	220-240V	50-60Hz
GPCP0824	COMO 1x18W 2D C/W Gear & Lamp	220-240V	50-60Hz
GPCP0825	COMO 1x38W 2D C/W Gear & Lamp	220-240V	50-60Hz
GPCP0826	COMO 2x24W PLL C/W Gear & Lamp	220-240V	50-60Hz
GPCP0827	COMO 2x26W PLL C/W Gear & Lamp	220-240V	50-60Hz
GPCP0828	COMO 2x36W PLL C/W Gear & Lamp	220-240V	50-60Hz

NOTE: Please specify colour and type of lamp when ordering

ordering information