



bollard 3

ADVANTAGES

- Architectural stylish appearance
- Choice of colour

APPLICATION



- Walkways, pedestrian path
- Square, architectural & landscape

FEATURES


- Die cast and extruded aluminium housing with high resistant to oxidation.
- Finished with epoxy powder coating.
- Standard colour – Black. Option colour – White and Silver.
- Ballast compartment mounted on a removable gear tray.
- Internal louvre reflector for anti glare.
- Vandal resistant and V2 self extinguishing polycarbonate.
- Lamp holder in ceramic with silver contacts. Standard E27.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 18W~26W, 70W~80W
- Lamp Type : 1xPLC
HPS, M/H or MBF
- Dimensions (mm) : $\varnothing 202 \times 400/600/800(H)$

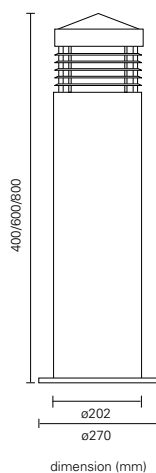

PLC 1x26W

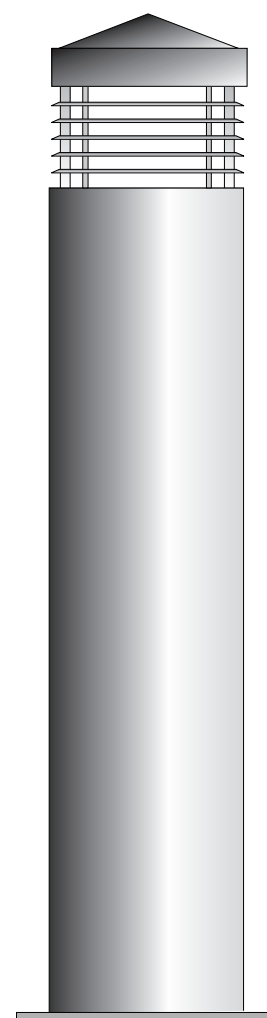

Model No.	Description	Voltage	Frequency	Lamp
GPCP0436	BOLLARD 3 70W HPS C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0441	BOLLARD 3 70W HPS C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0442	BOLLARD 3 80W MBF C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0443	BOLLARD 3 70W M/H C/W Gear & Bulb	220-240V	50-60Hz	E27
GPCP0444	BOLLARD 3 1x26W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24d3
GPCP0445	BOLLARD 3 1x18W PLC C/W Gear & Lamp	220-240V	50-60Hz	G24d2

ordering information