





par 3



dimension (mm)

ADVANTAGES

- High performance
- Easy maintenance

APPLICATION


- Architectural building, landscape
- Tree lighting, walkway, square, park

FEATURES

- Die cast aluminium housing (plinth mount).
- Finished with epoxy powder coating, resistant to corrosion.
- Standard colour – Black or Green.
- Shock resistant tempered glass. Stainless steel fasteners.
- Weatherproof and durable silicon sealed rubber gaskets.
- Ceramic lamp holder and silver plated contact.
- Optimal : Earth Spike, Visor / Louvre.

CHARACTERISTICS

- Optical assembly : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 60~150W
- Lamp type : Par 38 Lamp
- Lamp holder type : E27
- Dimensions (mm) : Ø180(L) x 340(H)
- Approx. net weight : 1.5~2.5 kg

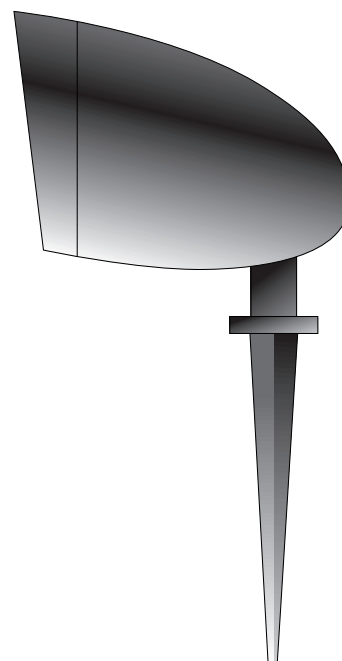

Model No.	Description	Voltage	Frequency	Lamp
GPL00184	GRUPPE PAR 3/P	220-240V	50-60Hz	E27
GPL00183	GRUPPE PAR 3/M	220-240V	50-60Hz	E27

ordering information