



carrera



ADVANTAGES

- Architectural stylish appearance, stainless steel
- Vandal resistant, anti corrosion, easy maintenance

APPLICATION



- Architectural & landscape
- Walkway, park, facade
- Pedestrian path, shopping square, street path

FEATURES

- Corrosion resistant extrusion aluminum alloy-copper.
- Covers and bracket in corrosion resistant high pressure diecast aluminum alloy.
- Acid treated, thermal shock proof, tempered protection clear glass.
- Anodised finished on polished aluminium reflector.
- Available in symmetrical & asymmetrical light distribution.
- All external screws in 316 stainless steel with silicone grease dipping.
- Available in various colour options.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 14W/21W/28W/35W (T5), 18W/36W (T8)
- Lamp Type : Linear Fluorescent T5 & T8
- Approx. Net weight : 2~3 kg

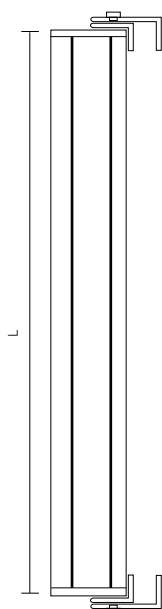

dimension (mm)



Model No.	No. of lamp	L(mm)	W(mm)	H(mm)
GPCP0829	CARRERA / T5 14W C/W Gear & Lamp	620	65	85
GPCP0830	CARRERA / T5 21W C/W Gear & Lamp	620	65	85
GPCP0831	CARRERA / T5 28W C/W Gear & Lamp	620	65	85
GPCP0832	CARRERA / T5 35W C/W Gear & Lamp	620	65	85
GPCP0833	CARRERA / T8 18W C/W Gear & Lamp	620	65	85
GPCP0834	CARRERA / T8 36W C/W Gear & Lamp	620	65	85

ordering information