





space 250




Glass Bowl



Acrylic Bowl

dimension (mm)

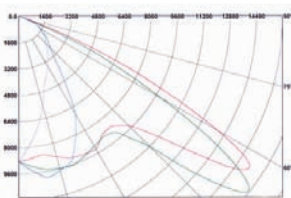

Space 250 250W HPSV

ADVANTAGES

- Architectural stylish appearance
- High performance, easy maintenance
- Choice of colours

APPLICATION


- Streets, parking areas
- Architectural, landscape & amenity
- Suggested mounting height : 6~12 meters.

FEATURES

- Enclosed luminaire for pole mounting.
- Die cast aluminium housing top and bottom with round canopy make stylish appearance.
- Finished with epoxy polyester powder paint.
- Ballast components mounted on a removable gear tray for safety and easy maintenance.
- Silicon sealed optic – Tight seal 66.
- Anodised finish on hydroformed aluminium faceted reflector.
- Tempered clear curve glass. Filter optical.
- Acrylic cover bowl (available upon request).
- Easy access to ballast compartment and lamp. Lamp replacement without tools.
- Adjustable lamp socket – Standard E40.
- Adjustable spigot for 42~60mm diameter.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~250W
- Lamp Type : HPS or M/H
- Dimensions (mm) : ø580 x 342(H)
- Approx. Net weight : 11~12 kg

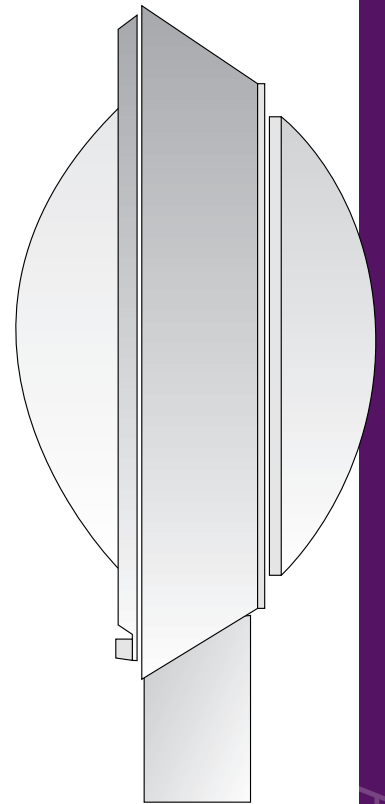

Model No.	Description	Voltage	Frequency	Lamp
GPCP0019	SPACE 250 70W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0020	SPACE 250 100W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0021	SPACE 250 150W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0022	SPACE 250 250W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0023	SPACE 250 70W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0024	SPACE 250 150W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0025	SPACE 250 250W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E40

ordering information