




## urban

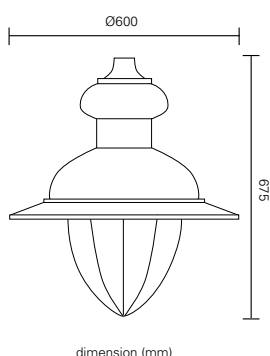

### ADVANTAGES

- Architectural stylish appearance
- Easy maintenance
- Choice of colours

### APPLICATION


- Streets, amenity
- Parking area, building, perimeter
- Architectual & landscape
- Suggested mounting height – 6 ~ 10 meter

### FEATURES

- Enclosed luminaire for pole mounting.
- Cast and turned aluminium housing.
- Finished with epoxy powder paint. Standard – Black.
- Ballast components mounted on a removable gear tray.
- Weatherproof and durable silicone rubber gasket.
- Anodised finished on hydroformed aluminium faceted reflector.
- Bowl in moulded clear tempered glass or UV stabilized PC.
- Ceramic lamp holder with silver contact plate – Standard E27.

### CHARACTERISTICS

- Optical assembly : IP 55  
: IP 65 (on request)
- Ballast Compartment : IP 55
- Electrical Insulation : Class I
- Voltage : 220V / 240V
- Wattage : 70 ~ 250W
- Lamp Type : HPS, MBF or MH
- Approx. Net weight : 9 ~ 10 kg

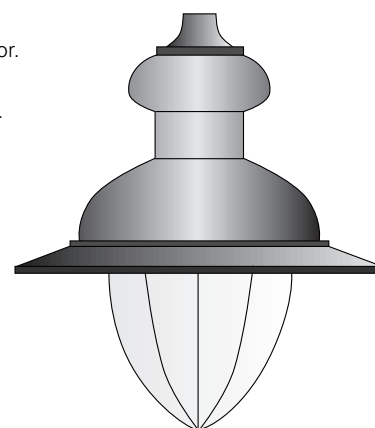

Model	Description	Voltage	Frequency	Lamp
GPCP0210	URBAN 70W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0211	URBAN 150W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0212	URBAN 250W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0216	URBAN 80W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0217	URBAN 125W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0218	URBAN 250W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0213	URBAN 70W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0214	URBAN 150W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0215	URBAN 250W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	E40

# ordering information