

Viata 150W HPSV

viata (indirect light)

ADVANTAGES

- Architectural stylish appearance
- High performance, easy maintenance
- Anti corrosion

APPLICATION


- Streets, pedestrian, parking area, security
- Perimeter, park, architectural & landscape
- Suggested mounting height : 3~8 meters

FEATURES

- Enclosed luminaire for post top mounting.
- Die cast aluminium housing with cover.
- Finished with epoxy cationic electrocoating and phosphochromate treatment paint. Corrosion resistant.
- Standard colour – Silver, grey, black.
- Ballast compartment mounted on a removable gear tray.
- Light pollution – indirect reflector.
- Vandal resistant and V2 self-extinguishing polycarbonate UV stabilized diffuser.
- Adjustable spigot for 60~76mm diameter.
- Lamp holder in ceramic with silver plate contacts.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 54
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70~150W
- Lamp Type : HPS or M/H
- Dimensions (mm) : 585(W) x 512(H)
- Approx. Net weight : 12~15 kg

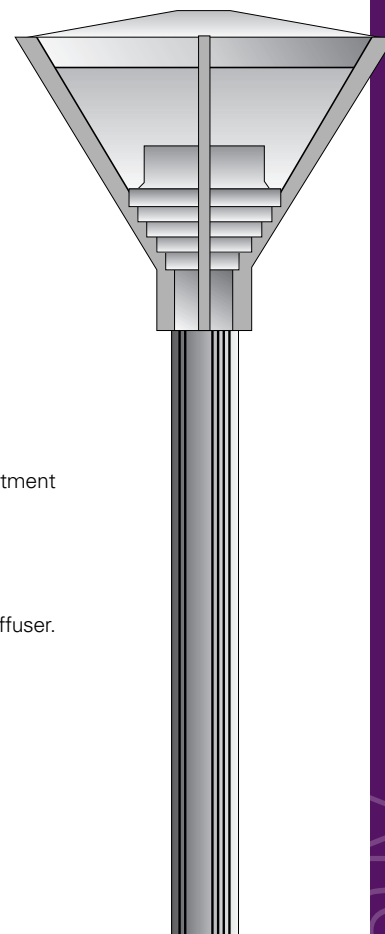

Model No.	Description	Voltage	Frequency	Lamp
GPCP0010	VIATA 70W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s
GPCP0015	VIATA 150W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s
GPCP0011	VIATA 70W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s
GPCP0012	VIATA 150W M/H C/W Control Gear & Lamp	220V-240V	50-60Hz	Rx7s

ordering information