




valley

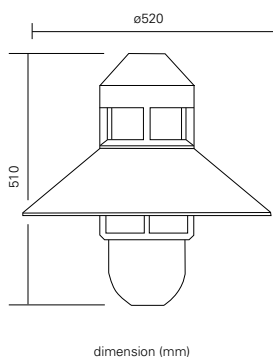

ADVANTAGES

- Architectural stylish appearance
- High performance & easy maintenance
- Choice of colours

APPLICATION


- Streets, amenity, parking area, hotel premises
- Security, perimeter lighting, pedestrian
- Architectural & Landscape
- Suggested Mounting Height – 4.5 meters

FEATURES

- Enclosed luminaire for post top mounting or wall mounted
- Supporting body made from turned high thickness (15/10mm) aluminium sheet
- High purity (99.85%) aluminium reflector, oxidized and brightened, fixed to a circular metallic frame painted RAL 9010 by polyester powders
- Ballast components mounted on a removable gear tray
- Diffuser made from UV stabilizer polycarbonate frost or clear (Vandal resistant) – optional tempered flat glass
- Weatherproof and durable silicone rubber gasket
- Ceramic lamp holder with silver contact plate. Standard color: Black

CHARACTERISTICS

- Optical assembly : IP 55
- Ballast Compartment : IP 55
- Electrical Insulation : Class I
- : Class II (on request)
- Voltage : 220V~240V
- Wattage : 50~125W
- Lamp Type : HPS, M/H or MBF
- Dimensions (mm) : 520(L) x 510(H)
- Approx. Net weight : 8~9 kg

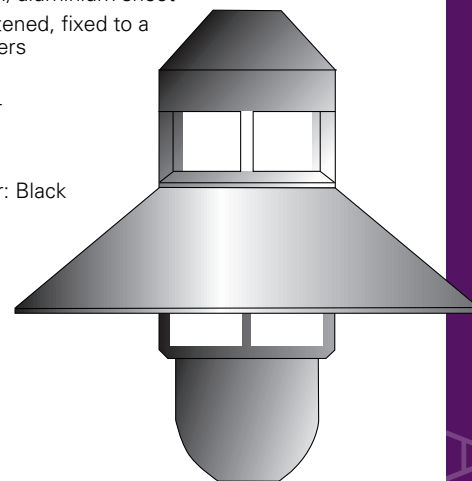

Model No.	Description	Voltage	Frequency	Lamp
GPCP0656	VALLEY 50W HPS C/W Control Gear & Lamp	220-240V	50-60Hz	E27
GPCP0657	VALLEY 70W HPS C/W Control Gear & Lamp	220-240V	50-60Hz	E27
GPCP0658	VALLEY 70W MH C/W Control Gear & Lamp	220-240V	50-60Hz	E27
GPCP0659	VALLEY 50W MBF C/W Control Gear & Lamp	220-240V	50-60Hz	E27
GPCP0660	VALLEY 80W MBF C/W Control Gear & Lamp	220-240V	50-60Hz	E27

ordering information