

## vios

### ADVANTAGES

- Architectural stylish appearance
- Aluminium and polycarbonate
- High performance and easy maintenance
- Anti Corrosion

### APPLICATION


- Streets, pedestrian
- Parking area, security
- Perimeter, park
- Architectual & landscape
- Suggested mounting height 3~6 meters

### FEATURES

- Enclosed luminaire for post top mounting.
- Die cast aluminium housing with one piece aluminium cover/canopy.
- Finished with epoxy cationic electro coating and phosphochromate treatment paint. Corrosion resistant.
- Standard colour – Black.
- Ballast compartment mounted on a removable gear tray.
- Light pollution – control louver.
- Vandal resistant and V2 self-extinguishing polycarbonate UV stabilized diffuser.
- Lamp holder in ceramic with silver plate contacts – E27.

### CHARACTERISTICS

- Optical/Ballast Compartment : IP 54
- Electrical Insulation : Class I
- Voltage : 220V~240V
- Wattage : 70~125W
- Lamp Type : HPS, M/H or MBF
- Dimensions (mm) : 380(L) x 630(H)
- Approx. Net weight : 10 kg

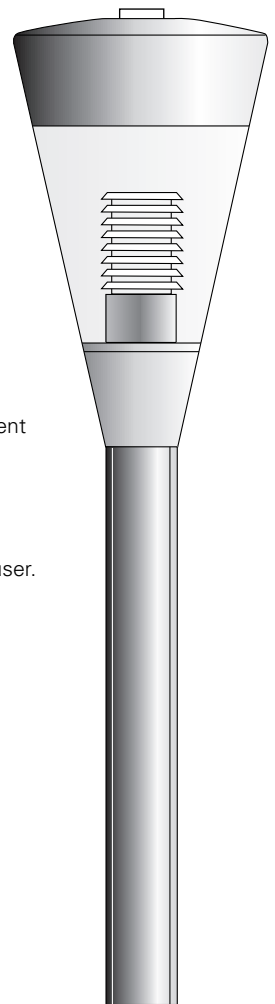

Model No.	Description	Voltage	Frequency	Lamp
GPCP0010A	VIOS 70W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0011A	VIOS 70W MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0012A	VIOS 80W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPCP0013A	VIOS 125W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27

ordering information