

vita

ADVANTAGES

- Architectural stylish appearance
- Aluminium and polycarbonate
- High performance and easy maintenance
- Anti Corrosion

APPLICATION


- Streets, pedestrian, parking area
- Security, perimeter, park
- Architectual & landscape
- Suggested mounting height 3~5 meters

FEATURES

- Enclosed luminaire for post top mounting.
- Die cast aluminium housing.
- Finished with epoxy cationic electro coating and phosphochromate treatment paint. Corrosion resistant.
- Standard colour – Black.
- Ballast compartment mounted on a removable gear tray.
- Light pollution – control louver.
- Vandal resistant and V2 self-extinguishing polycarbonate UV stabilized diffuser.
- Lamp holder in ceramic with silver plate contacts – E27.

CHARACTERISTICS

- Optical/Ballast Compartment : IP 65
- Electrical Insulation : Class I
- Voltage : 220V~240V
- Wattage : 70~150W
- Lamp Type : HPS, M/H or MBF
- Dimensions (mm) : 590(L) x 795(H)
- Approx. Net weight : 10 kg

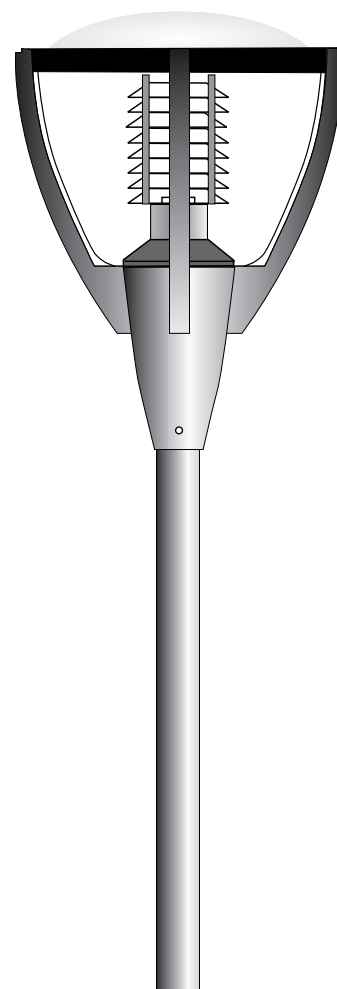

Model	Description	Voltage	Frequency	Lamp
GPKP0001	VITA 70W HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPKP0002	VITA 70W MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E27/G12
GPKP0003	VITA 80W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPKP0004	VITA 125W MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPKP0005	VITA 120W MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E27
GPKP0006	VITA 150W MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E27

ordering information