





### cosmo WWS

#### CONSTRUCTION

Directional downlight - wall washing at 52° to vertical wall


#### CHARACTERISTICS

- Ceiling Rim : Die cast aluminium in white epoxy paint (Ral 9002). Other colors available upon request
- Reflector : High polished anodised aluminium
- Housing : Die cast aluminium in epoxy powder paint with heat dissipation fins and plug in connection
- Lamp Holder : G12 and E27
- Lamp : M/Halide and Par
- Wattage : 70W~150W HIT and 75W (Par 30)
- Voltage : 220~240V
- Gear Box : Encapsulated in polyester resin form with heat resistant (silicon) cable connection (for HID range)
- Insulation Class : Class 1
- Index of protection : IP 20
- Dimensions (mm) : 203(L) x 235(H)
- Net Weight : 2.5~3 kg



dimension (mm)

Ø195

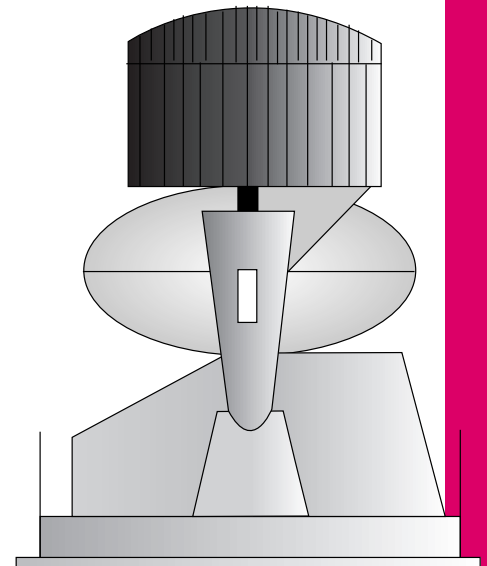

Model No.	Description	Voltage	Frequency	Lamp
GPCP0369	COSMO WWS/75/PAR C/W Lamp	220-240V	50-60Hz	E27
GPCP0370	COSMO WWS/70/HIT C/W Gear & Lamp	220-240V	50-60Hz	G-12
GPCP0371	COSMO WWS/150/HIT C/W Gear & Lamp	220-240V	50-60Hz	G-12

# ordering information