



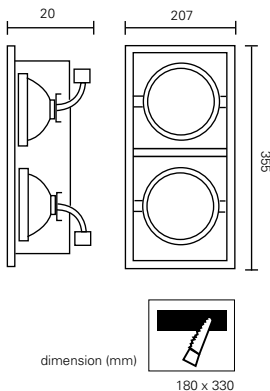

### cosmo RT/HID 1 & RT/HID 2




#### CONSTRUCTION

Die cast aluminium or high grade steel rim in white colour polyester epoxy powder coating. Highly polished anodised aluminium reflector in matt finish. Robust and light-weight electro-galvanised steel frame.

#### CHARACTERISTICS

- Ceiling Rim : High grade steel in grey epoxy powder paint.
- Reflector : High polish aluminium anodised aluminium with tempered glass
- Housing : Metal in epoxy powder paint with plug in connection.
- Lamp Holder : G12 (VDE)
- Lamp : Metal Halide Lamp
- Wattage : 70W~150W
- Voltage : 220V/240V 50Hz
- Gear Box : Encapsulated in polyester resin form with heat resistant (silicon) cable connection
  
- Insulation Class : Class 1
- Index of Protection : IP 23
- Dimensions (mm) : 207(L) x 207(W) x 13(H) RT/HID 1  
: 355(L) x 207(W) x 20(H) RT/HID 2
- Net Weight : 2~4 kg

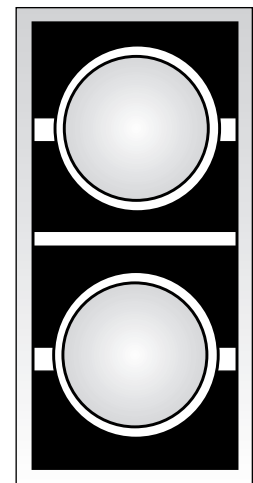

Model No.	Description	Voltage	Frequency	Lamp
GPCP0381	COSMO RT/HID/1/70W MH C/W Gear & Lamp	220-240V	50-60Hz	G12
GPCP0382	COSMO RT/HID/1/150W MH C/W Gear & Lamp	220-240V	50-60Hz	G12
GPCP0383	COSMO RT/HID/2/70W MH C/W Gear & Lamp	220-240V	50-60Hz	G12
GPCP0384	COSMO RT/HID/2/150W MH C/W Gear & Lamp	220-240V	50-60Hz	G12

ordering information