

dimension (mm)


target H/GL

CONSTRUCTION

Downlight for Horizontal mount compact Fluorescent lamps.

CHARACTERISTICS

- Ceiling Rim : High grade steel in white epoxy powder paint (Ral 9002). Other colours available upon request.
- Reflector : High polished aluminium reflector. Frosted glass protector (on request).
- Housing : Metal with cooling fins and louvre epoxy powder paint.
- Lamp Holder : G x 24d1 – VDE
G x 24d2 – VDE
G x 24d3 – VDE
- Lamp : 1 x TC-D, 2 x TC-D
- Wattage : 13W ~ 26W
- Voltage : 220V/240V 50Hz
- Insulation Class : Class 1
- Index Of Protection : IP 20
- Net Weight : 1.5 kg

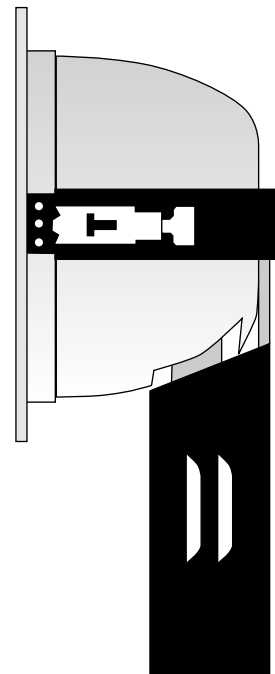

Model No.	Description	Voltage	Frequency	Lamp
GPCP0300	TARGET 8/H/GL/113 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0301	TARGET 8/H/GL/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0302	TARGET 8/H/GL/213 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0303	TARGET 8/H/GL/218 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0304	TARGET 8/H/S/113 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0305	TARGET 8/H/S/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0306	TARGET 8/H/S/213 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0307	TARGET 8/H/S/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0321	TARGET 6/H/G/218 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0322	TARGET 6/H/G/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2

G-Glossy S-Sand L-Lens

ordering information