



cosmo 9/H/G/HX-(N)

CONSTRUCTION




Downlight for Horizontal mount compact Fluorescent lamps with cross louvre.

CHARACTERISTICS

- Ceiling Rim : Die cast aluminium in white epoxy powder paint (Ral 9002). Other colours available upon request.
- Reflector : Highly polished vacuum metalised low - glare controlled reflector. Optional- cross louvre / blade in silver finish.
- Housing : Die-cast aluminium housing with cooling fins and louvre epoxy powder paint with plug in connector
- Lamp Holder : G x 24d1 - VDE
G x 24d2 - VDE
G x 24d3 -VDE
- Lamp : 1x TC-D, 2 x TC-D
- Wattage : 18W ~ 42W
- Voltage : 220V/240V 50Hz
- Insulation Class : Class 1
- Index Of Protection : IP 20
- Net Weight : 1.10 kg

Optional : COSMO 9/H/G/HX-NV

*NV is the crossblade version

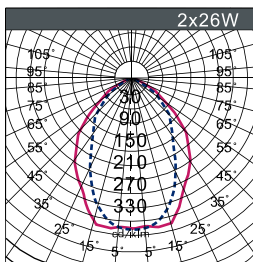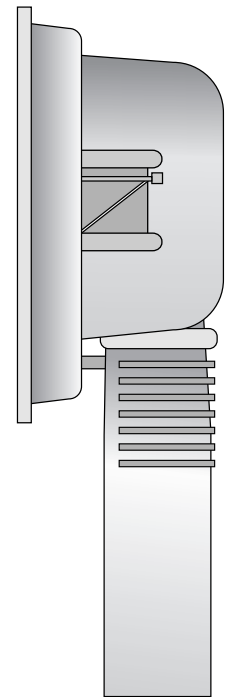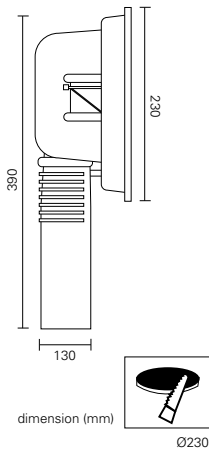

Model No.	Description	Voltage	Frequency	Lamp
GPCP0359	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0360	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0361	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d3
GPCP0362	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d1
GPCP0363	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d2
GPCP0364	COSMO 9 H/G/HX-N C/W Gear & Lamp	220-240V	50-60Hz	Gx24d3

ordering information