


## fire

### CONSTRUCTION

Downlight for Horizontal mount compact Fluorescent lamps.

### CHARACTERISTICS

Ceiling Rim	:	Polycarbonate
Reflector	:	High polished aluminium reflector
Housing	:	Polycarbonate
Lamp Holder	:	G x 24d1 – VDE G x 24d2 – VDE G x 24d3 – VDE
Lamp	:	1 x TC-D, 2 x TC-D
Wattage	:	13W ~ 26W
Voltage	:	220V/240V 50Hz
Insulation Class	:	Class 1
Index Of Protection	:	IP65
Net Weight	:	1.5 kg

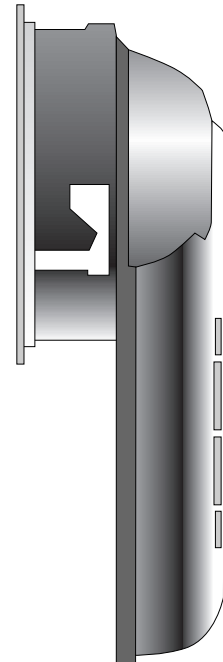

Model No.	Description	Voltage	Frequency	Lamp
GPCPF300	FIRE 8/H/GL/113 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d1
GPCPF301	FIRE 8/H/GL/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d2
GPCPF302	FIRE 8/H/GL/213 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d1
GPCPF303	FIRE 8/H/GL/218 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d2
GPCPF304	FIRE 8/H/S/113 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d1
GPCPF305	FIRE 8/H/S/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d2
GPCPF306	FIRE 8/H/S/213 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d1
GPCPF307	FIRE 8/H/S/118 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d2
GPCPF321	FIRE 8/H/GL/126 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d3
GPCPF322	FIRE 8/H/GL/226 C/W Gear & Lamp	220-240V	50-60Hz	Gx 24d3

# ordering information