



avenue (IP65/IP66*)



dimension (mm)


The AVENUE series is designed with careful selection of the best materials and components to assure perfect operation under the most extreme conditions. The diffuser is hinged to the body*; with the options of plastic or stainless steel clip-on toggles; for easy maintenance and lamp replacement. Its pleasant appearance also reduce direct glare and yet provide an excellent light distribution for visual comfort.

APPLICATION

Ideal for harsh, humid & dusty environment such as parking areas, canopy areas, loading bays, industrial areas, production areas, factory, workshops, etc., where sufficient illumination and safety is required with a low glare is required.

TECHNICAL DATA

- Body : Made of injection mould acrylic (ABS) or polycarbonate
- Diffuser : Made of injection mould acrylic or polycarbonate
- Lamp source : T8 18/20W, 36/40W and 58/65W T5*
- Electrical data : 230V-50Hz, Power Factor 0.9
- Wire : Heat resistant 105°C
- Ballast : Vacuum-impregnated with polyester resin
- Condenser : Metallized polypropylene firm
- Starter : Series circuit (4-22W) and single circuit (4-65W)
- Lamp and starter holder : Made of injection mould polycarbonate
- Index of Protection : IP65/IP66*
- Optional Components
 - High frequency electronic ballast
 - Emergency power pack
 - 2A fuse socket connector
 - Radio interference suppressor

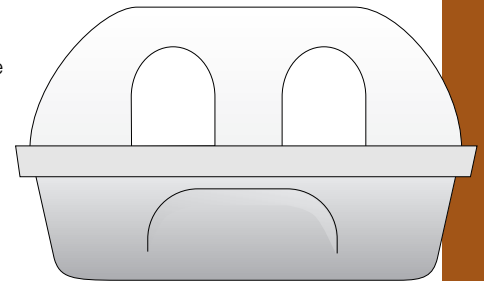

*Upon request

Model No.	Description	L(mm)	W(mm)	H(mm)
OCP00003	AVENUE w/proof fluo ftg 1x18W C/W Gear & Lamp	670	110	110
OCP00004	AVENUE w/proof fluo ftg 2x18W C/W Gear & Lamp	670	160	110
OCP00001	AVENUE w/proof fluo ftg 1x36W C/W Gear & Lamp	1270	110	110
OCP00002	AVENUE w/proof fluo ftg 2x36W C/W Gear & Lamp	1270	160	110
OCP00005	AVENUE w/proof fluo ftg 1x58W C/W Gear & Lamp	1570	110	110
OCP00006	AVENUE w/proof fluo ftg 2x58W C/W Gear & Lamp	1570	160	110

ordering information