



zenith CAT-2



The ZENITH 'CAT-2' series is developed through a synthesis of technological research design, technical skill, and a strong determination to reach the highest standard in lighting engineering by anticipating once more the tendency and requirements of the market. It is designed with high efficiency and specific lighting characteristics for its broad light distribution with a significant improvement in glare control characteristics. It provides efficient lighting performance as well as the visual comfort. A spring latching system allows for easy maintenance and lamp replacement.

APPLICATION

Ideal for areas with intensive VDT usage such as school, office, conference room, computer room, commercial area, etc., where high performance lighting with low glare is required.

TECHNICAL DATA

- Body : Made of heavy gauge sheet steel.
- Louvre : Anodised aluminium in either specular, semi specular or matt finish with "V" cross blades.
- Paintwork : Fully coated with a high gloss white epoxy powder, giving resilient finish.
- Lamp source : T8 18/20W and 36/40W.
- Electrical data : 220V~240V 50/60 Hz.
- Wire : Heat resistant 105°C.
- Ballast : Vacuum-impregnated with polyester resin.
- Condenser : Metallised polypropylene film.
- Starter : Series circuit (4-22W) and single circuit (4-65W).
- Lamp and starter holder : Moulded from polycarbonate material.
- Dimensions : various-according to lamp configurations.
- Optional Components
 - High frequency electronic ballast
 - Emergency power pack
 - 2A fuse socket connector
 - Radio interference suppressor
 - Imperial size and surface mount version available upon request

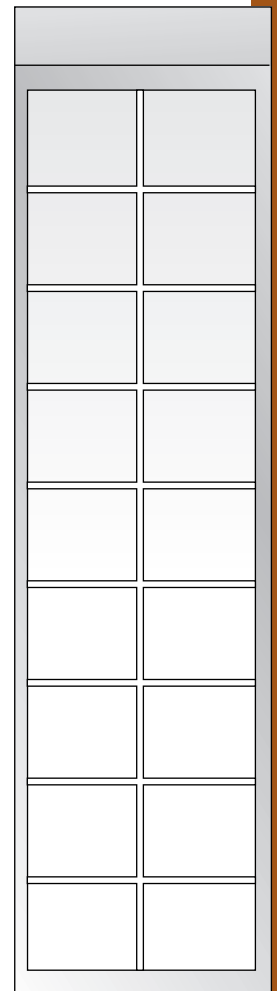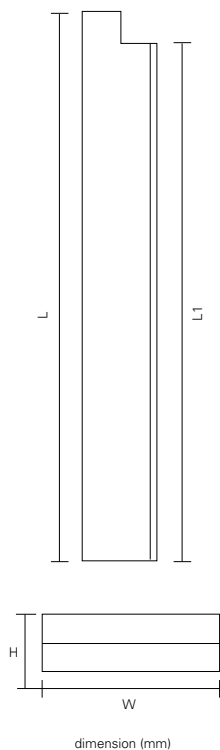

Model No.	No. of lamp	L(mm)	L1(mm)	W(mm)	H(mm)
ZNCP0148	2x18W	612	595	295	100
ZNCP0149	3x18W	612	595	595	100
ZNCP0150	4x18W	612	595	295	100
ZNCP0151	3x36W	1222	1195	595	100
ZNCP0152	4x36W	1222	1195	295	100
ZNCP0153	2x36W	1222	1195	295	100

ordering information