



zenith F1



The ZENITH 'F1' series is a blend of versatility and technical innovation. It is the meeting of commercial requirements and application solutions with tremendous versatility and ease of installation. Quality, safety and flexibility have been a primary objective when producing this modern and attractive lighting fitting. It provides an evenly high illuminance and quality appearance, top lighting performance as well as the visual comfort. A pivot latching system allows for easy maintenance and lamp replacement.

APPLICATION


Ideal for general interior lighting such as school, retail area, bank, office, departmental store, commercial area, etc., where high performance lighting with a high tech appearance is required.

TECHNICAL DATA

- Body : Base is made of heavy gauge sheet steel and side is made of extruded aluminium.
- Louvre : Anodized aluminium in either specular, semi specular or matt finish with profile cross blades.
- Paintwork : Fully coated with a high gloss white epoxy powder, giving resilient finish.
- Lamp source : T8 18/20W and 36/40W.
- Electrical data : 220V~240V 50/60 Hz.
- Wire : Heat resistant 105°C.
- Ballast : Vacuum-impregnated with polyester resin.
- Condenser : Metallized polypropylene firm.
- Starter : Series circuit (4-22W) and single circuit (4-65W).
- Lamp and starter holder : Mould from polycarbonate material.
- Dimensions : various-according to lamp configurations.
- Optional Components
 - High frequency electronic ballast
 - Emergency power pack
 - 2A fuse socket connector
 - Radio interference suppressor

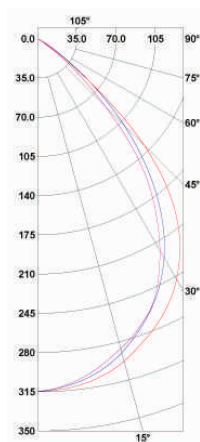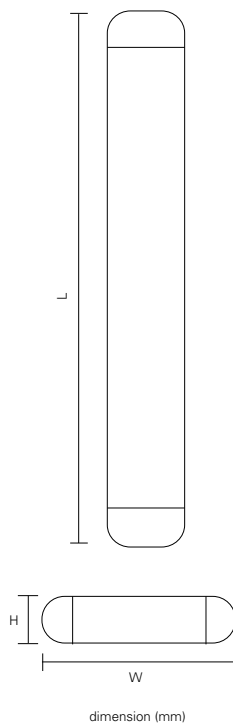

Zenith F1 2x36W

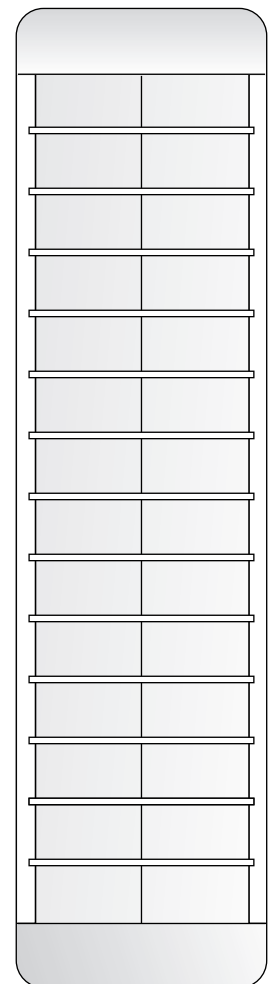

Model No.	No. of lamp	L(mm)	W(mm)	H(mm)
ZNCP0154	2x36W	1296	295	68
ZNCP0155	2x18W	686	296	68
ZNCP0156	2x18W PLC	300	300	68

ordering information