






worklight 2

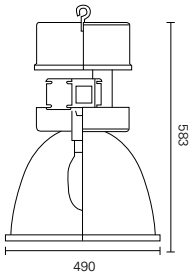


Wire guard



Tempered glass



dimension (mm)



Worklight 400W MHL

ADVANTAGES

- High performance, easy maintenance
- Fully aluminium & glass
- Large aluminium gear box

APPLICATION


- Factories, assembly plants, warehouse, hanger
- Foundries, multipurpose hall, commercial
- Suggested mounting height : 5m and above

FEATURES

- Die cast aluminium ballast housing.
- Finish with epoxy polyester powder paint – Standard Black.
- Zinc coated safety chains attach with ballast housing for safe common maintenance. Stainless steels external screws.
- High reflectance anodised finished on aluminium reflector.
- Ballast components mounted on a removable gear tray for easy maintenance.
- Thermal shock resistant tempered glass in a silicone rubber sealing gasket with securing clip in nickel coated steel.
- Ceramic lamp holder with silver plated contact – Standard E40.
- Emergency switch quartz system available (on request).

CHARACTERISTICS

- Optical assembly : IP 23 (IP 54 available upon request)
- Ballast Compartment : IP 54
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 125W~400W
- Lamp type : HPS, M/H or MBF
- Dimensions (mm) : 490(L) x 583(H)
- Approx. Net weight : 6~9 kg

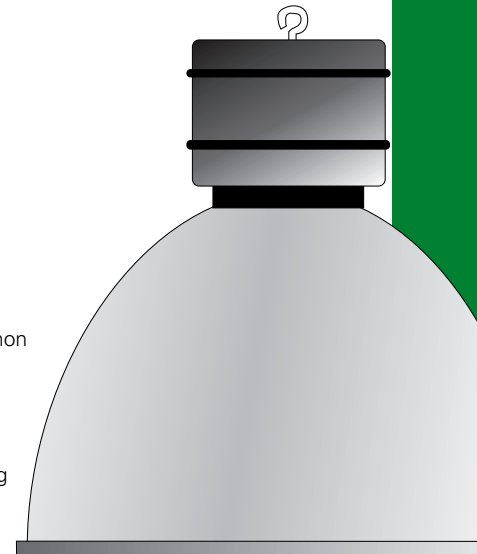

Model No.	Description	Voltage	Frequency	Lamp
GPCP0722	WORKLIGHT 2 250W HPS C/W Gear & Bulb	220-240V	50-60Hz	E40
GPCP0723	WORKLIGHT 2 400W HPS C/W Gear & Bulb	220-240V	50-60Hz	E40
GPCP0274	WORKLIGHT 2 250W MBF C/W Gear & Bulb	220-240V	50-60Hz	E40
GPCP0275	WORKLIGHT 2 400W MBF C/W Gear & Bulb	220-240V	50-60Hz	E40
GPCP0726	WORKLIGHT 2 250W MH C/W Gear & Bulb	220-240V	50-60Hz	E40
GPCP0727	WORKLIGHT 2 400W MH C/W Gear & Bulb	220-240V	50-60Hz	E40

ordering information