




buried 50

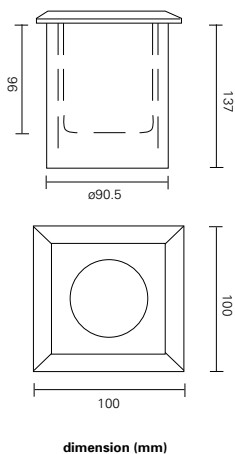

dimension (mm)

ADVANTAGES

- Architectural stylish appearance
- Stainless steel
- Vandal resistant
- Anti corrosion

APPLICATION


- Buried lighting, walkway, park
- Architectural & landscape
- Pedestrian, sea side area
- Hotel, path, square, street

FEATURES

- Enclosed luminaire for buried.
- Stainless steel housing and frame with lighting corrosion proof. In AISI 316 stainless steel finish.
- Acid treated, all thermal shock proof tempered protection glass and load resistant (max 2000 kg).
- Ballast or transformed are mounted separately.
- In built with recessed mounting box.
- Ceramic lamp holder with silver plated contact – Standard Gu5.3.

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 12V 50/60 Hz
- Wattage : 20W~50W
- Lamp Type : Tungsten Halogen
- Lamp Holder : Gx5.3
- Dimensions (mm) : 100(L) x 100(W) x 137(H)
- Approx. Net weight : 0.5~1 kg

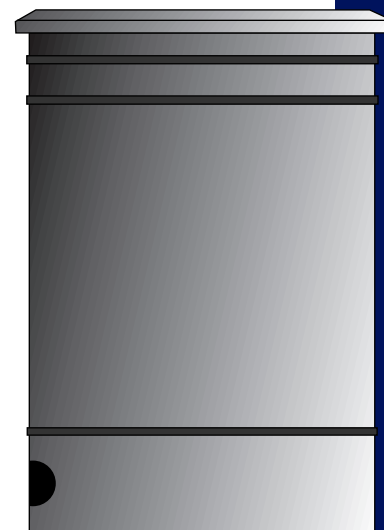

Model No.	Description	Voltage	Frequency	Lamp
GPL00054	BURIED 50 Square MR16	220-240V	50-60Hz	GU 5.3
GPL00055	BURIED 50 Round MR16	220-240V	50-60Hz	GU 5.3

ordering information