




buried 100

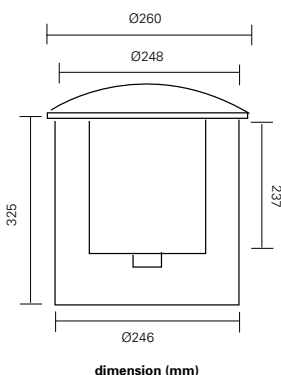

Remarks:

Installation / Mounting – To ensure efficient drainage, gravel must be used to a depth of 400mm beneath the housing and around it. (Refer to installation method)

ADVANTAGES

- Architectural stylish appearance.
- Fully aluminium and glass
- Easy maintenance, vandal resistant
- Anti corrosion

APPLICATION

- Buried light, walkways, carriage ways
- Pedestrian path, square & street
- Architectual & landscape

FEATURES

- Enclosed luminaires for buried ground.
- Die cast aluminium housing and frame with high resistance of oxidation.
- Finished with phosphating chromate pre-treatment. Corrosion proof. Epoxy powder coating. Standard colour – Black.
- Acid treated, heat resistant, shock proof tempered. Protection glass and load resistant (max. 2000 kg).
- Anodised finished on polished aluminium reflector.
- Lamp holder in ceramic with silver plated contact.
- Built-in with recessed mounting box.

CHARACTERISTICS

- Optical assembly : IP 66
: IP 67 (on request)
- Ballast Compartment : IP 66
- Electrical Insulation : Class I
: Class II (on request)
- Voltage : 220V/240V
- Wattage : 70W ~ 150W
- Lamp Type : HPS & MH
- Approx. Net weight : 6 ~ 8 kg



Model No.	Description	Voltage	Frequency	Lamp
GPL00082	BURIED 100 70W HPS C/W Control Gear & Lamp	220-240V	50-60Hz	RX7s
GPL00083	BURIED 100 70W M/H C/W Control Gear & Lamp	220-240V	50-60Hz	RX7s
GPL00084	BURIED 100 150W M/H C/W Control Gear & Lamp	220-240V	50-60Hz	RX7s
GPL00085	BURIED 100 70W M/H C/W Control Gear & Lamp	220-240V	50-60Hz	G12
GPL00086	BURIED 100 150W M/H C/W Control Gear & Lamp	220-240V	50-60Hz	G12

ordering information