


buried 300 / 300SQ

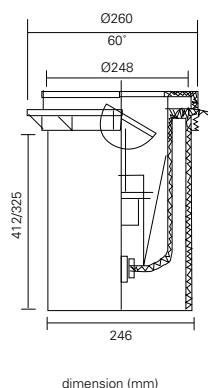

ADVANTAGES

- Architectural stylish appearance, Stainless steel
- Vandal resistant, anti corrosion, easy maintenance

APPLICATION

- Architectural & landscape
- Walkway, park, seaside area
- Pedestrian path, shopping square, street path

FEATURES

- Enclosed luminaires for buried ground.
- Stainless steel housing and frame with highly corrosion proof.
- In AISI 316 stainless steel finish.
- Acid treated, thermal shock proof, tempered protection glass and pressure resistant (max 2000 kg).
- Lamp holder – in ceramic with silver plated contact.
- Ballast compartment mounted on a removable gear tray.
- Anodised finished on polished aluminium reflector.
- In built with recessed mounting box.
- Buried 300 series – adjustable reflector (for G12 only).

CHARACTERISTICS

- Optical assembly : IP 66
- Ballast Compartment : IP 66
- Electrical Insulation : Class 1
- Voltage : 220V~240V 50/60 Hz
- Wattage : 70W~150W
- Lamp Type : M/H (Rx7s)
- Dimensions (mm) : $\varnothing 260 \times 325(H)$ - 70W
: $\varnothing 260 \times 412(H)$ - 150W
- Approx. Net weight : 6~8 kg



| Model No. | Description | Voltage | Frequency | Lamp |
|-----------|--|-----------|-----------|------|
| GPCP0094 | BURIED 300 70W M/H C/W Control Gear & Lamp | 220V-240V | 50-60Hz | Rx7s |
| GPCP0095 | BURIED 300 150W M/H C/W Control Gear & Lamp | 220V-240V | 50-60Hz | Rx7s |
| GPCP0096 | BURIED 300 70W M/H C/W Control Gear & Lamp | 220V-240V | 50-60Hz | G12 |
| GPCP0097 | BURIED 300 150W M/H C/W Control Gear & Lamp | 220V-240V | 50-60Hz | G12 |
| GPCP0851 | BURIED 300 35W CDM-R C/W Control Gear & Lamp | 220V-240V | 50-60Hz | E27 |
| GPCP0852 | BURIED 300 70W CDM-R C/W Control Gear & Lamp | 220V-240V | 50-60Hz | E27 |

ordering information