




aquaris 1 / aquaris 2

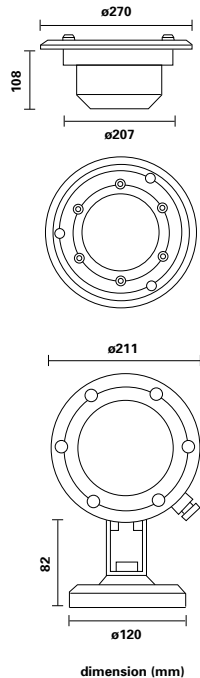

ADVANTAGES

- High performance, easy maintenance
- Stainless steel, anti corrosion

APPLICATION


- Waterfall, fountain
- Ponds, pool, water reservoirs
- Shipyard, overhead bridge

FEATURES

- Enclosed luminaire for underwater lighting.
- Stainless steel housing and frame. Corrosion resistance.
- Fastener with stainless steel or silicon bronze.
- Control gear mounted on removable tray in die-cast aluminium box (separately).
- Low wattage (12V) with colour lamp (upon request).

CHARACTERISTICS

- Optical assembly : IP 68
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240 ~12V
- Wattage : 50W~300W
- Dimensions (mm) : 270(W) x 108(H) (Aquaris 1)
211(W) x 293(H) (Aquaris 2)
- Approx. Net weight : 1~3 kg (Aquaris 1)
2~4 kg (Aquaris 2)

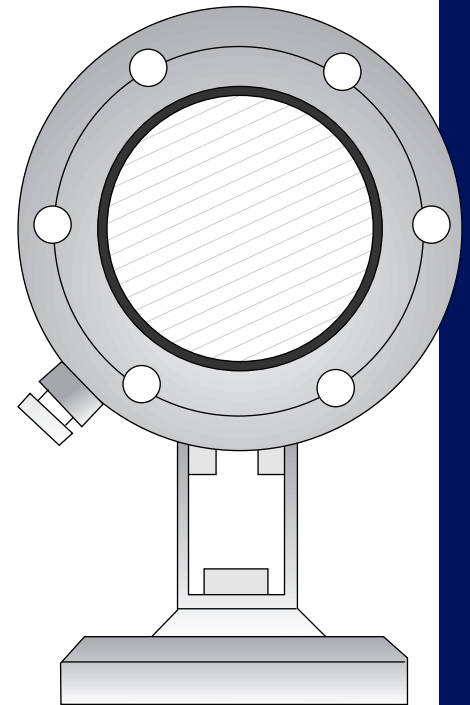

Model No.	Description	Voltage	Frequency	Lamp
GPL00041	GRUPPE AQUARIS 1 50W - 300W (E)	220-240V	50-60Hz	E27
GPL00042	GRUPPE AQUARIS 2 50W - 300W (E)	220-240V	50-60Hz	E27

ordering information