




megalux 2000

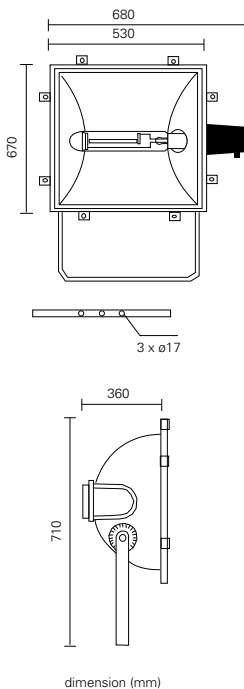

ADVANTAGES

- High performance & easy maintenance
- Fully aluminium and glass
- Low wind surface

APPLICATION


- Sport Field, indoor area, airport apron
- Monumental, building, large area
- Recreation, stadium with broadcasting

FEATURES


- Die cast aluminium housing with cooling fins.
- Finished with epoxy powder paint. Standard colour – Black.
- Resistant to corrosive environment.
- High reflectance, anodised and polished reflector attach in housing.
- Tempered flat glass, resistant to thermal, shock and impact. Installed on the body with stainless steel external screws and weather proof silicon rubber sealing gaskets.
- The rear cover with built in ignitor and can be opened for lamp replacement and maintenance without modifying the pointing adjustment.
- Internal glare / spill light control arc cut off skirt- optional.
- Provide narrow and wide beam photometric distribution.
- Ceramic lamp holder and silver plated contact.
- Hot instant restart system available upon request.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V/380V 50/60 Hz
- Wattage : 2000W
- Lamp type : M/H
- Lamp holder type : E40
- Dimensions (mm) : 680(L) x 360(W) x 710(H)
- Approx. Net weight : 16~18 kg



Mega 2000 2000W MHL

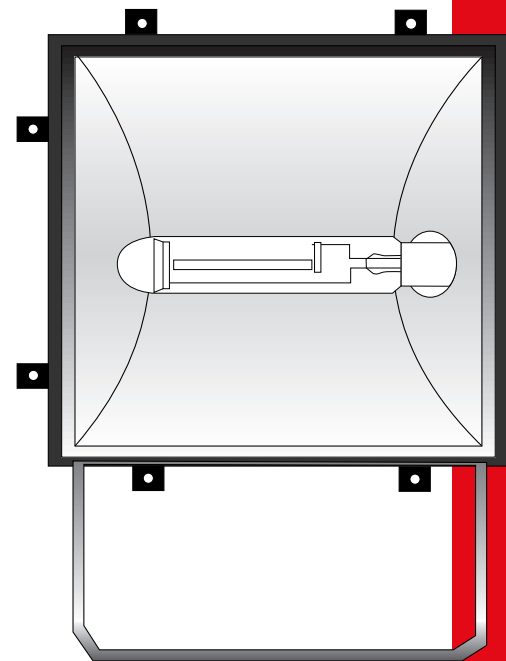

Model No.	Description	Voltage	Frequency	Lamp
CCP000127	MEGALUX 2000 2000W MH C/W Gear & Tube	220V-240V	50-60Hz	E40
CCP000128	MEGALUX 2000 2000W MH C/W Gear & Tube	380V	50-60Hz	E40

ordering information