







zoid



dimension (mm)



ADVANTAGES

- Architectural stylish appearance
- Full aluminium die-cast body
- Heat resistant, tempered glass
- High performance

APPLICATION


- Signage, facades, building, monuments
- Parking area, sport areas, recreation area

FEATURES

- Die cast aluminium housing.
- Corrosion - resistant powder paint finish.
- Standard colour - Black or White.
- Integral control gear. Ballast components mounted on removable gear tray.
- Anodised aluminium reflector.
- Weatherproof and durable silicon rubber gasket.
- Thermal shock resistant tempered glass in a hinged die cast aluminium frame.
- Stainless steel screw.
- Ceramic lamp holder and silver plated contact (Standard E-40).

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class I
- : Class II (on request)
- Voltage : 220V / 240V
- Wattage : 150W~400W
- Lamp type : HPSV, M/H & MBF
- Dimensions (mm) : 410(L) x 145(W) x 150(H)
- Approx. Net weight : 6~10 kg

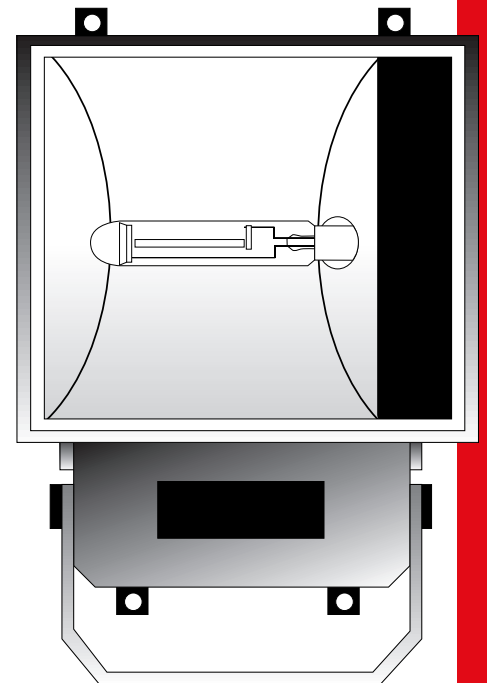

Model No.	Description	Voltage	Frequency	Lamp
GPCP0227	ZOID 150 HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0228	ZOID 250 HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0229	ZOID 400 HPS C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0230	ZOID 250 MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0231	ZOID 400 MH C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0232	ZOID 250 MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E40
GPCP0233	ZOID 400 MBF C/W Control Gear & Lamp	220V-240V	50-60Hz	E40

ordering information