





polyflood II



dimension (mm)

ADVANTAGES

- Architectural stylish appearance
- Vandal resistant polycarbonate body
- Clear polycarbonate lens - resists breakage
- High performance

APPLICATIONS


- Signage, Facades, Building, Monuments
- Recreation Area, Parking Area, Sport Areas

FEATURES

- Vandal resistant polycarbonate housing.
- Corrosion-proof.
- Standard colour - Black.
- Integral control gear. Ballast components mounted on removable gear tray.
- Anodised aluminium reflector.
- Weatherproof and durable silicon rubber gasket.
- Clear polycarbonate lens.
- Stainless steel screws for easy maintenance.
- Lamp holder - E27 and R7S.

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class I
Class II (on request)
- Voltage : 220V / 240V
- Wattage : 42W-70W
- Lamp type : MBF, M/H, HPS & PLT
- Dimensions (mm) : 270(L) x 146(W) x 314(H)
- Approx. Net weight : 3 ~ 4 kg (w/o control gear)

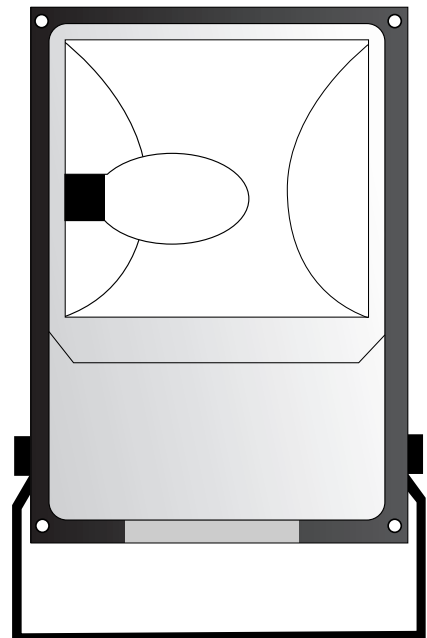

Model No.	Description	Voltage	Frequency	Lamp
GPCP0769	POLYFLOOD II 70W HPS C/W Gear & Tube	220V-240V	50-60Hz	E27
GPCP0770	POLYFLOOD II 80W MBF C/W Gear & Tube	220V-240V	50-60Hz	E27
GPCP0771	POLYFLOOD II 70W M/H C/W Gear & Tube	220V-240V	50-60Hz	E27
GPCP0772	POLYFLOOD II 70W M/H C/W Gear & Tube	220V-240V	50-60Hz	R7S
GPCP0773	POLYFLOOD II 70W 2x42W PLT C/W Gear & Tube	220V-240V	50-60Hz	GX 24q-4

ordering information