





new star



dimension (mm)

ADVANTAGES

- High performance
- Easy maintenance
- Fully aluminium and glass
- Choice of colour

APPLICATION


- Building, facades, airport
- Apron, harbour, monument
- Security, signages, sport area, recreation

FEATURES

- Finished with epoxy polyester powder paint, resistant to corrosion.
- Standard colour - Black
- Integral control gear. Ballast components mounted on the removable gear tray.
- Anodised finished on aluminium reflector.
- Thermal shock resistant tempered glass in a hinged die cast aluminium frame.
- Anti glare. Stainless steel screw.
- Weatherproof and durable silicon rubber gasket and provides Asymmetrical beam photometric distribution.
- Ceramic lamp holder and silver plated contact - Standard E-40.

CHARACTERISTICS

- Optical assembly : IP65
- Ballast Compartment : IP65
- Electrical Insulation : Class I
- Voltage : 220V/240V
- Wattage : 70 ~ 400W
- Lamp type : HPS, M/H & MBF
- Approx. Net weight : 8 ~ 12kg

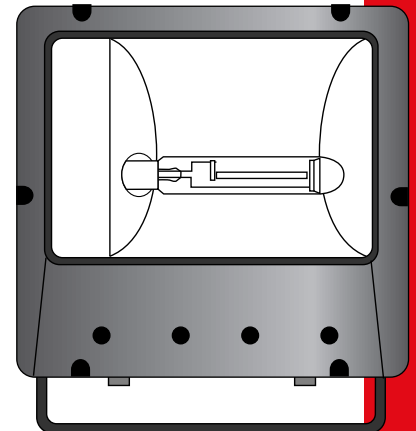

Model No.	Description	Voltage	Frequency	Lamp
GPCP0774	NEW STAR 150W HPSV C/W Gear & Tube	220V-240V	50-60Hz	E40
GPCP0775	NEW STAR 250W HPSV C/W Gear & Tube	220V-240V	50-60Hz	E40
GPCP0776	NEW STAR 400W HPSV C/W Gear & Tube	220V-240V	50-60Hz	E40
GPCP0777	NEW STAR 250W M/H C/W Gear & Tube	220V-240V	50-60Hz	E40
GPCP0778	NEW STAR 400W M/H C/W Gear & Tube	220V-240V	50-60Hz	E40

ordering information