




floodlights



# SHEEK



The Sheek combines fantastic, saturated wall washing color and color changing effects with high-performance, operational efficiency, and simplified installation. The fixture is fully enclosed in a stylish and rugged aluminium housing and meets specifications for use in wet locations.

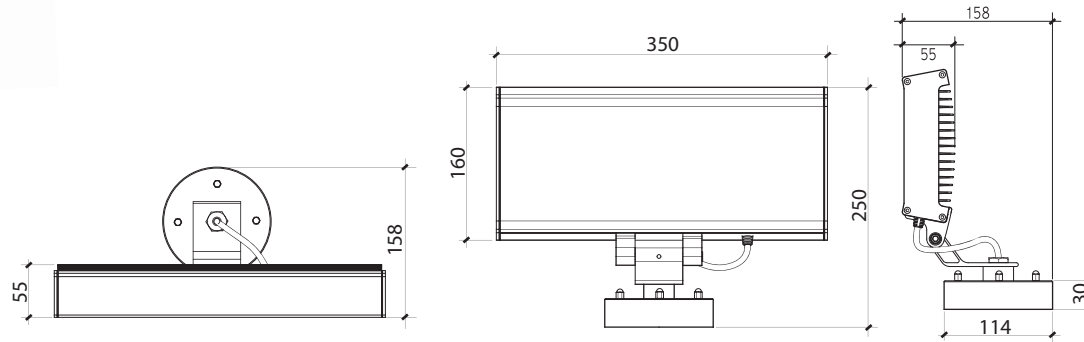

sheek -     -    -



- 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 7
- APPLICATION COLOR CODE

SOURCE	LED
LUMENS	700~1400
LAMPLIFE	50,000 HRS
INPUT VOLTAGE	24VDC
OPERATING TEMP	-20°~60°
PROTECTION RATING	IP66

COLOR CODE	COLOR	BEAM ANGLE	POWER (WATTS)	PROJECTION DISTANCE	HOUSING DESCRIPTION	GEAR/CONTROLS	SIZE (MM)	SCHEMATIC DIAGRAM
WARM	3000K	10° 30°	10W	<20.0	DIE-CAST ALUMINUM BODY WITH 5MM CLEAR TEMPERED GLASS	BUILT-IN DRIVER + DMX DECODER (DMX CONTROLLABLE)	LENGTH	see Appendix
COOL	5500K						350.0	
ORED	RED						WIDTH	
OGRN	GREEN						158.0	
OBLU	BLUE						HEIGHT	
ORGB	RGB						250.0	

\*\*The company is constantly developing and improving its products. All descriptions, illustrations, and specifications mentioned present only general particulars and shall not form any part of any contract. The right is reserved to change specifications without prior notice.

\*\*FILL UP ORDERING REFERENCE ACCORDINGLY > example: NAME -     -    -