





floodlights

UNIX

The Unix is a high power LED with high efficient floodlight LED. Its rational design is suitable for facade lighting and outdoor commercial buildings.

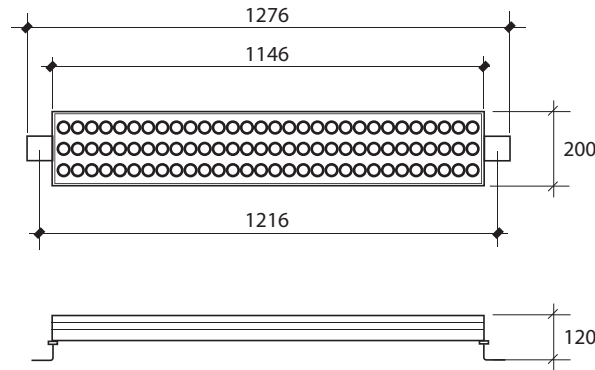

- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
- APPLICATION COLOR CODE

unix - - -

SOURCE	LED
LUMENS	10000
LAMPLIFE	50,000 HRS
INPUT VOLTAGE	220~240VAC
OPERATING TEMP	-20°~60°
PROTECTION RATING	IP66

COLOR CODE	COLOR	BEAM ANGLE	POWER (WATTS)	PROJECTION DISTANCE	HOUSING DESCRIPTION	GEAR/CONTROLS	SIZE (MM)	SCHEMATIC DIAGRAM
WARM	3000K	10° 30° 50°	310W	<50.0	ANODIZED ALUMINUM EXTRUSION BODY	REMOTE DRIVER + DMX DECODER (DMX CONTROLLABLE)	LENGTH	see Appendix
COOL	5500K						1276.0	
ORED	RED						WIDTH	
OGRN	GREEN						200.0	
OBLU	BLUE						HEIGHT	
ORGB	RGB						120.0	

**The company is constantly developing and improving its products. All descriptions, illustrations, and specifications mentioned present only general particulars and shall not form any part of any contract. The right is reserved to change specifications without prior notice.

**FILL UP ORDERING REFERENCE ACCORDINGLY > example: NAME - - -