




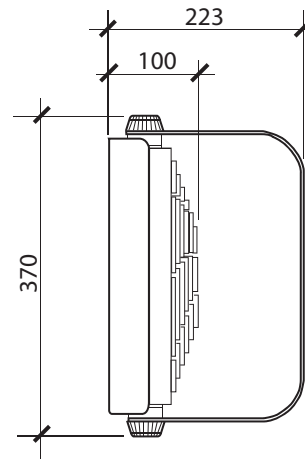

floodlights

# ZILAH

The Zilah is a high power LED floodlight. Its rational design is suitable for facade lighting and outdoor commercial buildings.



- 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 7
- APPLICATION COLOR CODE

zilah - 

--	--	--	--

 - 

--	--	--

 - 

--	--

SOURCE	LED
LUMENS	7500
LAMPLIFE	50,000 HRS
INPUT VOLTAGE	24VDC
OPERATING TEMP	-20°~60°
PROTECTION RATING	IP66

COLOR CODE	COLOR	BEAM ANGLE	POWER (WATTS)	PROJECTION DISTANCE	HOUSING DESCRIPTION	GEAR/CONTROLS	SIZE (MM)	SCHEMATIC DIAGRAM
WARM	3000K	10° 30°	162W	<50.0	DIE-CAST ALUMINUM BODY	BUILT-IN DRIVER + DMX DECODER (DMX CONTROLLABLE)	LENGTH	see Appendix
COOL	5500K						370.0 Ø	
ORED	RED						WIDTH	
OGRN	GREEN						HEIGHT	
OBLU	BLUE						223.0	
ORGB	RGB							

\*\*The company is constantly developing and improving its products. All descriptions, illustrations, and specifications mentioned present only general particulars and shall not form any part of any contract. The right is reserved to change specifications without prior notice.

\*\*FILL UP ORDERING REFERENCE ACCORDINGLY > example: NAME - 

0	R	G	B
---	---	---	---

 - 

0	3	0
---	---	---

 - 

0	1
---	---