




linear TETRA



For many retailers, restaurants, hotels and other building owners using LED solutions in signage, the use of the cool-to-the-touch Tetra is a natural extension of energy initiatives aimed at retiring less efficient, high-voltage neon systems. Plus, the low-voltage Tetra is up to 40% more energy efficient than neon.

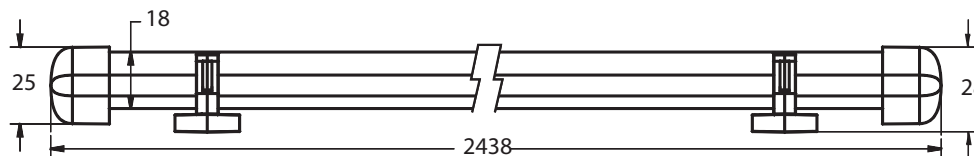

tetra - - -

SOURCE	LED
LUMENS	500 / meter
LAMPLIFE	50,000 HRS
INPUT VOLTAGE	24VDC
OPERATING TEMP	-40°~55°
PROTECTION RATING	IP66

COLOR CODE	COLOR	BEAM ANGLE	POWER (WATTS)	PROJECTION DISTANCE	HOUSING DESCRIPTION	GEAR/CONTROLS	SIZE (MM)	SCHEMATIC DIAGRAM
WARM	3000K	120°~330°	10.63W/M	N.A.	FLEXIBLE LIGHT ENGINE, LIGHT GUIDE DIFFUSER	REMOTE DRIVER + DMX DECODER (DMX CONTROLLABLE)	LENGTH	see Appendix
COOL	5500K						2438.0	
ORED	RED						WIDTH	
OGRN	GREEN						25.4 W/ GUIDE	
OBLU	BLUE						10.0 W/ GUIDE	
ORGB	RGB						HEIGHT	
		28.0						
		11.0						

**The company is constantly developing and improving its products. All descriptions, illustrations, and specifications mentioned present only general particulars and shall not form any part of any contract. The right is reserved to change specifications without prior notice.

**FILL UP ORDERING REFERENCE ACCORDINGLY > example: NAME - - -