



zenith diakon




The ZENITH 'DK' series consists of the basic and standard features of fluorescent lighting fitting, similar to the 'BC' series, with an extruded opal/prismatic diffuser in round / square shaped to enhance its elegant design. Its pleasant appearance also reduce direct glare and yet provide an excellent light distribution for visual comfort, particularly functionality simple and practical design.

APPLICATION

Ideal for general purposes lighting such as residential, washrooms, stairways, corridors, industrial areas, commercial areas, etc, where sufficient illumination and safety is required.

TECHNICAL DATA

- Body : Made of heavy gauge sheet steel.
- Diffuser : Round or square shaped opal/prismatic.
- Paintwork : Fully coated with a high gloss white epoxy powder, giving resilient finish.
- Lamp source : T8 18/20W and 36/40W.
- Electrical data : 220V~240V 50/60 Hz.
- Wire : Heat resistant 105°C.
- Ballast : Vacuum-impregnated with polyester resin.
- Condenser : Metallized polypropylene firm.
- Starter : Series circuit (4-22W) and single circuit (4-65W).
- Lamp and starter holder : Mould from polycarbonate material.
- Dimensions : various-according to lamp configurations.
- Optional Components
 - High frequency electronic ballast
 - Emergency power pack
 - 2A fuse socket connector
 - Radio interference suppressor

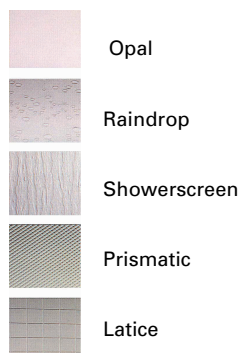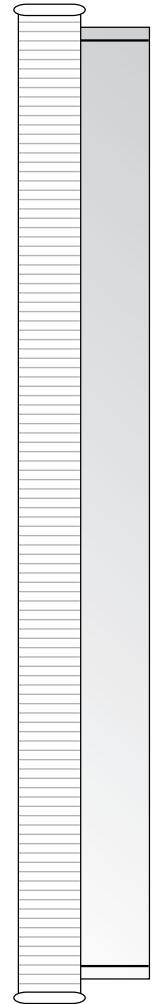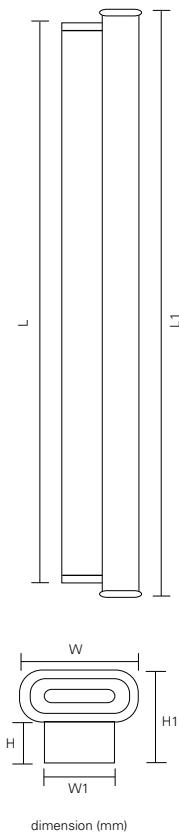

Model No.	No. of lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ZNCP0007/RD	1x18W	616	626	54	64	44	110
ZNCP0008/RD	2x18W	616	626	54	125	44	110
ZNCP0009/RD	1x36W	1225	1235	54	64	44	110
ZNCP0010/RD	2x36W	1225	1235	54	125	44	110
ZNCP0007/SD	1x18W	616	620	54	60	44	93
ZNCP0008/SD	2x18W	616	620	54	113	44	93
ZNCP0009/SD	1x36W	1225	1229	54	60	44	93
ZNCP0010/SD	2x36W	1225	1229	54	113	44	93

*Please specify the type of diffuser when order

ordering information